NEKO / MODULINE 35 Linear System

48V Low Voltage Modular Linear System

Standard Profile

Linear General Light
ML35-GL300/ ML35-GL600

Linear Accent Light
ML35-AL300/ ML35-AL600

Linear Wall Washer
ML35-LW600

Wall Washer
ML35-WW300

Pendant-Decoration
ML35-PD

Pendant L
ML35-PS90

Pendant M
ML35-PS72

Pendant S
ML35-PS55

Spot Square Twin
ML35-SST

Spot Square
ML35-SS

Spot Round Twin
ML35-RST35

Spot Round
ML35-RS35

Spot X
ML35-RS55

Trimless Recessed Profile

NEKO / MODULINE 35 Linear System

48V Low Voltage Modular Linear System

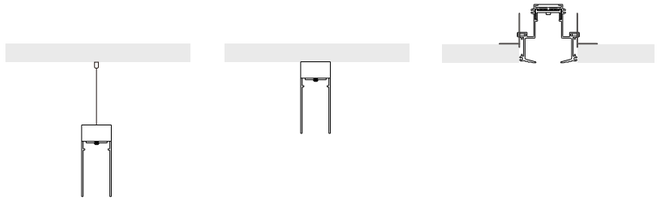



Linear General Light
ML35-GL300/ ML35-GL600

Linear Accent Light
ML35-AL300/ ML35-AL600



Linear Wall Washer
ML35-LW600

Wall Washer
ML35-WW300



Pendant-Decoration
ML35-PD

Pendant L
ML35-PS90

Pendant M
ML35-PS72

Pendant S
ML35-PS55

Spot Square Twin
ML35-SST

Spot Square
ML35-SS



Spot Round Twin
ML35-RST35

Spot Round
ML35-RS35

Spot X
ML35-RS55





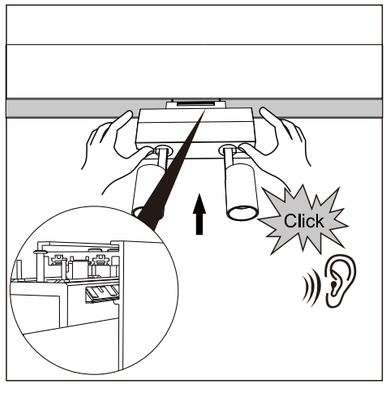

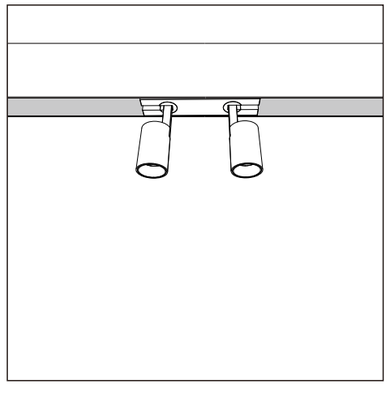

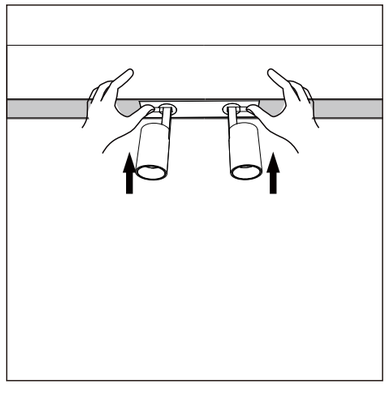

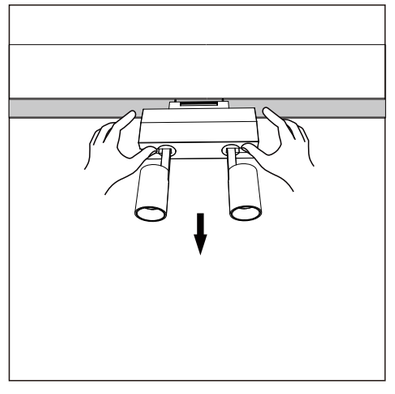

Trimless Recessed Profile

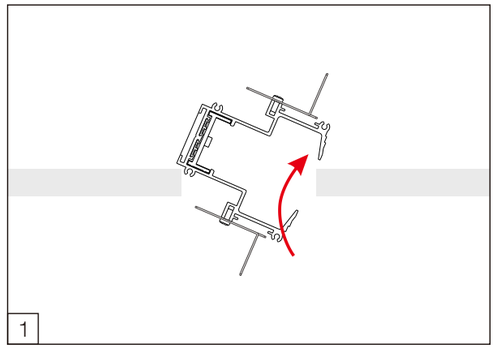

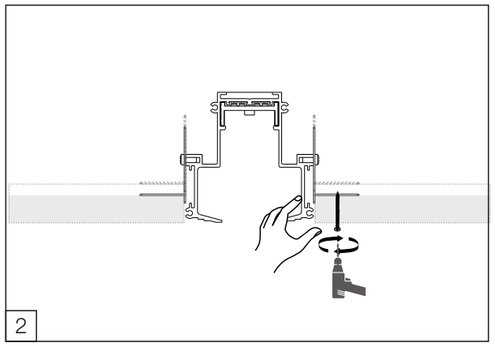

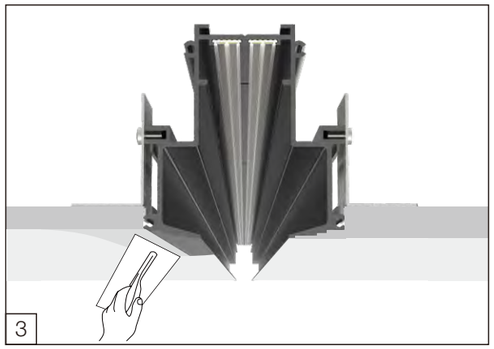

NEKO / MODULINE 35 Linear System

48V Low Voltage Modular Linear System

Light module

General Light Module

ML35-GL300

IP40



Order Information

ML35-GL300-13W

SAMSUNG LED pwered by 48V constant voltage LED driver, ON-OFF version

Model	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output	Module Length
ML35-GL300-13W-830(X)	12 W	13 W	48 VDC	83	3000K	100°	1700 lm	1200 lm	305mm
ML35-GL300-13W-840(X)	12 W	13 W	48 VDC	83	4000K	100°	1800 lm	1300 lm	305mm

ML35-GL300A-13W

SAMSUNG LED pwered by 48V constant voltage LED driver, 1-10V Dim version

Model	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output	Module Length
ML35-GL300A-13W-830(X)	12 W	13 W	48 VDC	83	3000K	100°	1700 lm	1200 lm	305mm
ML35-GL300A-13W-840(X)	12 W	13 W	48 VDC	83	4000K	100°	1800 lm	1300 lm	305mm

Light Distribution

3000K



For more info: www.nekolighting.com

Accent Light Module

ML35-AL300

IP40 UGR < 19



Order Information

ML35-AL300-15W

Osram LED pwered by 48V constant voltage LED driver, ON-OFF version

Model	LED Quantity	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output	Module Length
ML35-AL300-15W-830-35D(X)	10 LEDs	14 W	15 W	48 VDC	83	3000K	35°	1700 lm	1300 lm	305mm
ML35-AL300-15W-840-35D(X)	10 LEDs	14 W	15 W	48 VDC	83	4000K	35°	1800 lm	1400 lm	305mm

ML35-AL300A-15W

Osram LED pwered by 48V constant voltage LED driver, 1-10V Dim version

Model	LED Quantity	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output	Module Length
ML35-AL300A-15W-830-35D(X)	10 LEDs	14 W	15 W	48 VDC	83	3000K	35°	1700 lm	1300 lm	305mm
ML35-AL300A-15W-840-35D(X)	10 LEDs	14 W	15 W	48 VDC	83	4000K	35°	1800 lm	1400 lm	305mm

Light Distribution

3000K



For more info: www.nekolighting.com

NEKO / MODULINE 35 Linear System

48V Low Voltage Modular Linear System

Light module

Spot Light Module

ML35-RS55



18° 24° 36° IP40 UGR < 19

Order Information

ML35-RS55-14W

CITIZEN LED pwered by 48V constant voltage LED driver

Model	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output
ML35-RS55(X)-14W-930-18D	13 W	14 W	48 VDC	90	3000K	18°	1200 lm	950 lm
ML35-RS55(X)-14W-940-18D	13 W	14 W	48 VDC	90	4000K	18°	1300 lm	1000 lm
ML35-RS55(X)-14W-930-24D	13 W	14 W	48 VDC	90	3000K	24°	1200 lm	950 lm
ML35-RS55(X)-14W-940-24D	13 W	14 W	48 VDC	90	4000K	24°	1300 lm	1000 lm
ML35-RS55(X)-14W-930-36D	13 W	14 W	48 VDC	90	3000K	36°	1200 lm	950 lm
ML35-RS55(X)-14W-940-36D	13 W	14 W	48 VDC	90	4000K	36°	1300 lm	1000 lm

Remark: X= Blank(ON-OFF) X= A(1-10V Dim)

Light Distribution

3000K

18° ML35-RS55-14W-930-18D

Diameter (cm)	Height, Emax
Ø30	1m 3322lx
Ø60	2m 830x
Ø90	3m 369lx
Ø119	4m 208lx
Ø149	5m 133lx

20° 10° 0° 10° 20°

24° ML35-RS55-14W-930-24D

Diameter (cm)	Height, Emax
Ø37	1m 2611lx
Ø74	2m 653lx
Ø111	3m 290lx
Ø147	4m 163lx
Ø184	5m 104lx

20° 10° 0° 10° 20°

36° ML35-RS55-14W-930-36D

Diameter (cm)	Height, Emax
Ø70	1m 1058lx
Ø139	2m 264lx
Ø209	3m 118lx
Ø279	4m 66lx
Ø348	5m 42lx

20° 10° 0° 10° 20°

For more info: *www.nekolighting.com*

Spot Light Module

ML35-RS35



20° 35° IP40 UGR < 19

Order Information

ML35-RS35-4.5W

CREE LED pwered by 48V constant voltage LED driver

Model	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output
ML35-RS35(X)-4.5W-930-20D	4 W	4.5 W	48 VDC	90	3000K	20°	400 lm	300 lm
ML35-RS35(X)-4.5W-940-20D	4 W	4.5 W	48 VDC	90	4000K	20°	450 lm	350 lm
ML35-RS35(X)-4.5W-930-35D	4 W	4.5 W	48 VDC	90	3000K	35°	400 lm	300 lm
ML35-RS35(X)-4.5W-940-35D	4 W	4.5 W	48 VDC	90	4000K	35°	450 lm	350 lm

Remark: X= Blank(ON-OFF) X= A(1-10V Dim)

Light Distribution

3000K

20° ML35-RS35-4.5W-930-20D

Diameter (cm)	Height, Emax
Ø30	1m 1585lx
Ø60	2m 412x
Ø90	3m 180lx
Ø119	4m 107lx
Ø149	5m 75lx

20° 10° 0° 10° 20°

35° ML35-RS35-4.5W-930-35D

Diameter (cm)	Height, Emax
Ø70	1m 850lx
Ø139	2m 195lx
Ø209	3m 85lx
Ø279	4m 46lx
Ø348	5m 30lx

20° 10° 0° 10° 20°

For more info: *www.nekolighting.com*

NEKO / MODULINE 35 Linear System

48V Low Voltage Modular Linear System

Light module

Pendant Light Module

ML35-PS55



18° 24° 36°

IP40 UGR <19 5 GUARANTEE

Order Information

ML35-PS55-9.5W

CITIZEN LED pwered by 48V constant voltage LED driver

Model	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output
ML35-PS55(X)-9.5W-930-18D	9 W	9.5 W	48 VDC	90	3000K	18°	950 lm	720 lm
ML35-PS55(X)-9.5W-940-18D	9 W	9.5 W	48 VDC	90	4000K	18°	1050 lm	800 lm
ML35-PS55(X)-9.5W-930-24D	9 W	9.5 W	48 VDC	90	3000K	24°	950 lm	720 lm
ML35-PS55(X)-9.5W-940-24D	9 W	9.5 W	48 VDC	90	4000K	24°	1050 lm	800 lm
ML35-PS55(X)-9.5W-930-36D	9 W	9.5 W	48 VDC	90	3000K	36°	950 lm	720 lm
ML35-PS55(X)-9.5W-940-36D	9 W	9.5 W	48 VDC	90	4000K	36°	1050 lm	800 lm

Remark: X= Blank (ON-OFF) X= A (1-10V Dim)

Light Distribution

3000K







For more info: www.nekolighting.com

Pendant Light Module

ML35-PS72



15° 25° 30°

IP40 UGR <19 5 GUARANTEE

Order Information

ML35-PS72-19W

CITIZEN LED pwered by 48V constant voltage LED driver

Model	LED Power	System Power	LED Voltage	CRI	CCT	BEAM	LED Output	System Output
ML35-PS72(X)-19W-930-15D	18 W	19 W	48 VDC	90	3000K	15°	2000 lm	1600 lm
ML35-PS72(X)-19W-940-15D	18 W	19 W	48 VDC	90	4000K	15°	2100 lm	1700 lm
ML35-PS72(X)-19W-930-25D	18 W	19 W	48 VDC	90	3000K	25°	2000 lm	1600 lm
ML35-PS72(X)-19W-940-25D	18 W	19 W	48 VDC	90	4000K	25°	2100 lm	1700 lm
ML35-PS72(X)-19W-930-30D	18 W	19 W	48 VDC	90	3000K	30°	2000 lm	1600 lm
ML35-PS72(X)-19W-940-30D	18 W	19 W	48 VDC	90	4000K	30°	2100 lm	1700 lm

Remark: X= Blank (ON-OFF) X= A (1-10V Dim)

Light Distribution

3000K







For more info: www.nekolighting.com